


**X-THEATRE POS 1000** is the ideal solution for lifting carrier for theater. The machine is designed to be installed in a vertical position and horizontal ceiling. Metal structure is designed to maintain high rigidity of the system and therefore with a low noise level.

**X - POS THEATRE 1000** is equipped with the following components: Three-phase asynchronous motor type of service according to the needs of the client, double brake, special equipment, double limit, soft Cord Keeper and keeps the voltage, solid terminal soundproofing and cable drum (diameter Customised). Lifting heights, values and lifting speeds are adapted to the requirements customers. Design and components meet the high requirements of the EC Machinery Directive 2006/42, DIN 56950:2005-01.

#### TIPO X - POS THEATRE 1000 specifications

Charge on the drum 10 kN  
 Maneuvering speed 10 m / min  
 Winch Power 1.5 kW  
 Mechanical reduction gear PLN 95  $i = 100$   
 Maximum stroke 22.0 m  
 Number of cables 4  
 Cable diameter 8 mm  
 Factor of safety cables > 10  
 dimensions 400X1760X600  
 Class S3 Service



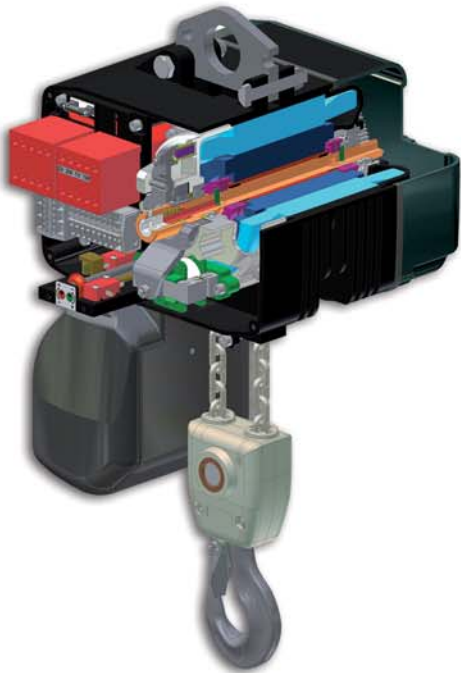

C-force: Electric chain hoist, capacity from 125 Kg to 2.500 Kg. Standard version, D8, D8+, BGV- C1

C-force exposure bearbeitet: Electric chain hoist, capacity from 125 Kg to 2.500 Kg. Standard version, D8, D8+, BGV- C1



Manual hoist



Stage maker: capacity from 125 Kg to 2000 Kg. Stage maker standard

